




● Specifications

Nominal Voltage		12V
Rated Capacity		1.2Ah
Dimensions	Total Height	2.28 inches (58mm)
	Height	2.05 inches (52mm)
	Length	3.82 inches (97mm)
	Width	1.69 inches (43mm)
Approximate Weight		1.32 lbs. (0.6kg)

● Characteristic

Capacity 77°F(25°C)	20h rate (0.06A)	1.2Ah
	10h rate (0.11A)	1.1Ah
	5h rate (0.19A)	1.02Ah
	1h rate (0.82A)	0.72Ah
	15 min rate (2.17A)	0.54Ah
Internal Resistance	Full Charged Battery 77°F(25°C)	85m Ω
Capacity Affected by Temperature (20h rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 68°F(20°C) (Capacity after)	3 month storage	90%
	6 month storage	80%
	12 month storage	60%
Max. Discharge Current 77°F(25°C)	18A(5s)	
Terminal	T1	
Charge (Constant Voltage, 25°C)	Cycle	14.5~14.9V(-24mV/°C) max. current: 0.36 A
	Float	13.6~13.8V(-18mV/°C)

DISCHARGE CHARACTERISTICS AT 25° C(77° F)

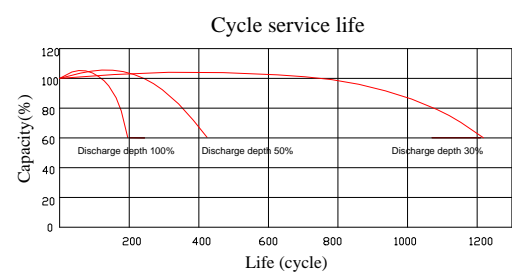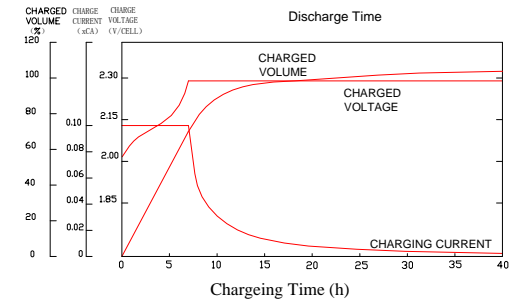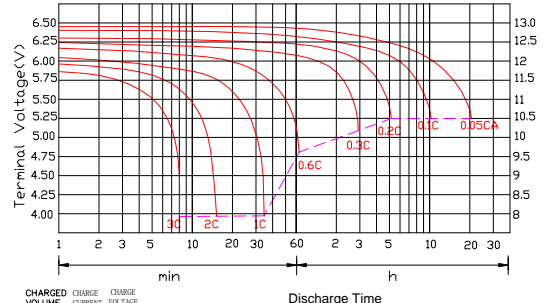

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	5.00	3.20	2.50	1.45	0.82	0.33	0.22	0.12	0.06
10.2V	4.75	3.04	2.4	1.39	0.79	0.33	0.22	0.118	0.06
10.5V	4.47	2.86	2.28	1.32	0.75	0.32	0.21	0.115	0.06

Constant Wattage Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	55.8	36.1	28.5	16.6	9.50	3.92	2.63	1.44	0.72
10.2V	53.0	34.3	27.4	15.9	9.15	3.92	2.63	1.44	0.72
10.5V	49.9	32.3	26.0	15.1	8.69	3.80	2.51	1.44	0.72